



Land Solutions

Sea Solutions

Air Solutions



SatDOCK-G 9555

9555SDG



Handsfree



Bluetooth



GPS




Tracking



Alert



USB Data

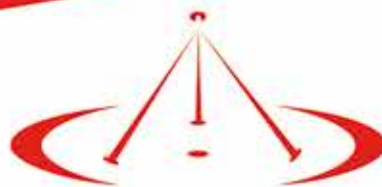

BEAM

iridium SatDOCK

9555SD-G

- ▶ **Handsfree**
- ▶ **Fully Integrated Communications**
- ▶ **Global Coverage**



Beam SatDOCK-G In-vehicle hands-free docking station provides a high quality semi-permanent installation for the Iridium 9555 handset. The docking station has inbuilt echo cancelling and full duplex technologies to provide superior voice quality and professional handsfree or privacy calls for various transport application.

The SatDOCK-G supports Tracking & Alert functionality via the dedicated in built GPS engine. Tracking messages can be pre configured to support periodic reporting, manual position report update via button press, remote polling or the sending of an emergency alert messages all via SMS / SMS to email or SBD [Short Burst Data]

The Iridium 9555 satellite handset, fits securely in the Dock which is compact in design, unlike other traditional docking kits that require another external box for installation, the Beam SatDOCK-G is all contained within the one single compact Dock. Other features include phone charging, in-built Bluetooth, USB data, inbuilt ringer and allows antenna and power to be permanently connected to the Dock ready for use. The Iridium 9555 handset is easily inserted and removed by the press of a button on the top of the dock making it very easy to use away from the Dock when required.

SatDOCK-G also supports the use of an optional active privacy handset or the fully featured intelligent handset, RST970 these simply and easily added to the SatDOCK-G.

SatDOCK-G provides the flexibility of using your handheld satellite telephone to support the use of equipment for a wide variety of applications. It has an in-built Bluetooth module for voice and data connectivity along with an intelligent tracking and alert reporting system utilizing the in-built GPS engine of the SatDOCK-G. The alert & tracking module can be configured to support periodic polling or emergency alert reporting.



Heavy Vehicles



Cargo Vessel / Captain & Crew Calling



Emergency Services



Handsfree Communication



Light Aircraft & Helicopter

KEY FEATURES & BENEFITS

- ▶ **SatDOCK-G CRADLE**
 - Securely holds 9555 handset
 - Robust design and construction
 - Charges 9555 handset ready for use
 - Integrated antenna connection
 - Integrated USB connectivity
- ▶ **HANDSFREE MODE**
 - In-built echo cancelling
 - Full duplex technology
 - Superior voice quality
- ▶ **TRACKING/GPS**
 - Tracking & alert monitoring capable
 - Periodic position reports or remotely polled
 - In-built GPS engine
 - Compatible with other tracking applications
- ▶ **PANIC/ALERTS**
 - Panic alert button in-built to cradle
 - Option of additional wired alert buttons
- ▶ **INTEGRATED BLUETOOTH**
 - Supports Bluetooth voice & data accessories
- ▶ **IN-BUILT RINGER**
 - In-built ringer for enhanced ring indication
- ▶ **VOICE, DATA, SMS, SBD**
 - Supports all Iridium voice, data, SMS & SBD services
- ▶ **PRIVACY & INTELLIGENT HANDSET**
 - Supports optional Beam privacy handset and Intelligent Handset
 - Auto sensing answer/hang-up intelligence
 - Switches between handset and handsfree modes
- ▶ **INSTALLATION**
 - Supports 9 - 32V DC power input
 - Flexible installation via universal mount, also suitable for wall mounting
 - Antenna, microphone and speaker installed in a convenient location
 - Allows semi-permanent installation
- ▶ **QUALITY**
 - 2 year peace of mind with a replacement guarantee
 - 100% factory tested
 - Full certified, Iridium, RoHS, CE, IEC60945
- ▶ **ACCESSORIES**
 - Privacy handset
 - Intelligent handset
 - Man down kit
 - Mag mount GPS/Iridium antenna

TRACKING AND ALERT/ALARM

TRACKING REPORTS:

Tracking messages can be sent from the SatDOCK-G via the following means;

1. Periodic position reporting, preset during software configuration of the dock
2. Upon an alert being activated via the Alert button on the cradle or connected alert button (external alert loop)
3. A current location position can be sent at any time by pressing the Track button on the front of the SatDOCK

ALERT/ALARM REPORTS:

Alert/Alarm messages can be activated on the SatDOCK-G using the two button press on the front of the cradle or alternatively an additional alert button or other trigger can be connected to the unit. Once configured the alert system is always on and will generate an alert message to the preset destination once triggered. Alerts can be triggered to continually send, until the alert is cleared either remotely, or locally on the SatDOCK-G unit.

ACCESSORIES


- RST970 Intelligent Handset
- RST755 Privacy Handset

- RST410 Man Down Kit
- RST705 Mag mount GPS/Iridium Antenna



TECHNICAL SPECIFICATIONS

| 9555SD-G POWER SPECIFICATIONS | | |
|-------------------------------|--|-------------------|
| Rated Input | 9-32 V DC, 2A max | |
| Average Power Consumption | Current @ 12V Power Watts | |
| Standby | 68mA | |
| Transmit + charging | 0.7A 8.4W | |
| Sleep Mode | 3mA 35mW | |
| PHYSICAL SPECIFICATIONS | Cradle | Packed |
| Dimensions - mm | 200 x 75 x 65 | 325 x 140 x 87 |
| Dimensions - inches | 7.9 x 3.0 x 2.7 | 12.8 x 5.5 x 3.4 |
| Weight | 0.37 kg (0.7 lbs) | 1.1 kg (2.43 lbs) |
| ENVIRONMENT SPECIFICATIONS | | |
| Operating Temperature | -20 to +70 °C (-4 to +158 °F) | |
| Charging Temperature | 0 to +40 °C (-32 to 104 °F) | |
| Storage Temperature | -30 to +70 °C (-22 to 158 °F) | |
| Atmospheric Protection | Conformal Coating to Circuit Board Assy | |
| EMC Compliance | CE, IEC60945:2002 (Section 9 & 10) 2009/19/EC - Automotive EMC directive | |
| RoHS | Full compliant RoHS Directive EU 2002/95/EC (All 6 substances) | |
| WEEE | For EU countries, this product must be collected separately from household waste, as defined in each region. This product must not be discarded together with household waste. | |
| Flame Retardant | UL94.0 | |
| Safety - SELV | IEC/EN/AS/NZ 60950-1 | |
| GPS MODULE (INTERNAL) | | |
| Receiver Type | 14 tracking channels, 51 Acquiring, L1 frequency (1575.42MHz) | |
| Update rate | 1Hz | |
| Accuracy | Position 2.5mCEP, Velocity 0.1m/s, Timing 300ns | |
| Acquisition TTFF | Cold 29sec, Hot 1sec | |
| Sensitivity | -161 dBm | |
| Operational Limits | Altitude 18000m, Velocity 515m/s | |
| Dynamics | 4G | |
| Active Antenna Recommendation | Minimum gain 15 - 20dB (to compensate signal loss in RF cable) Maximum noise figure 1.5 dB Maximum gain 50 dB | |

| INTERFACES | |
|--------------------------------------|---|
| External Speaker and Microphone | One horizontal 2-pin Microfit connector on the cable loom for speaker and one vertical 2-pin Microfit connector for microphone. |
| Privacy Handset (Line In/Out) | 4-pole 3.5mm audio jack at the bottom of the SatDOCK-G cradle. |
| Data Port (USB) | USB Mini-B 5-pin female (USB Slave). USB 2.0 compliant, CDC Serial profile. |
| Alarm (Alert) Loop1 input, 1 output) | Alarm Mode: "Normally-Closed" Loop IN to OUT Up to 500m cable run / multiple buttons. |
| Power Cable | 4-way Microfit socket. +Vin, OV (GND), and ACC (On/Off Sense). 9-32VDC tolerant. ACC sense: High(1) > +7Vdc Low (0) OV < +5Vdc |
| Horn Output | Green wire on the cable loom. Open collector output can be interfaced to 12 or 24VDC with up to 120mA current sink capability. |
| BLUETOOTH® MODULE (INTERNAL) | |
| System | Bluetooth® 2.0v+EDR (Enhanced Data Rates), 802.11 coexistence. |
| Profiles | HFP - Hands-Free Profile v.1.5 HFP-AG - Hands-Free Audio Gateway Profile v.1.5 & SPP - Serial Port Profile |
| Power | Default = Class 2 (< 10 metres). Class 1 (<100 metres), +18dBm max. 2.4GHz - 2.4835GHz Unlicensed ISM Band |
| Antenna | Integrated chip antenna |
| Regulatory | Bluetooth® identifier: B03005. CE 89/336/EEC - #EC/2006/20013C. FCC part 15 class B: SatDOCK-G contains Transmitter Module FCC ID: Q0QWT11. Canada: Cert# 5123A-BGTWT11E Japan: R201NY, 07215089  |
| Legal | The Bluetooth® word, mark and logos are owned by the Bluetooth® SIG, Inc. and any use of such marks by Beam Communications is under license. Other trademarks and trade names are those of their respective owners. |

APPROVED BEAM RESELLER

www.beamcommunications.com

www.beamcommunications.com



+61 3 8588 4500



+61 3 9560 9055



info@beamcommunications.com